

# PRIMARY PACKAGING

## **VPS 25C**

## **Vertical Packaging Machine**



IDUSTRIE

STYLES





















**PILLOW** 

**EUROHOLE** 

**ВLO**CK **ВO**TT**O**M











The VPS 25C continuous vertical form fill and seal machine is designed to provide a high speed packaging solution, for the food and non-food industry.

It is an electronically driven, compact, clean stainless steel machine, with quick and simple change-over and maintenance.


This is a solid machine equipped with latest electronics, meeting the needs of continuous cycle production lines, ensuring consistent quality and repeatability of the finished package.








PLC with HMI color touch screen

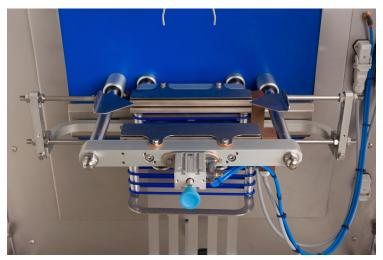

Sealing jaws pressure electronically controlled by servo motor

- servo driven square bottom forming system
- automatic print centering
- automatic reel centering
- industry 4.0 compliance
- eurohole
- integrations with various weighing systems, code daters, labeling and clipping machines

### **LAYOUT**

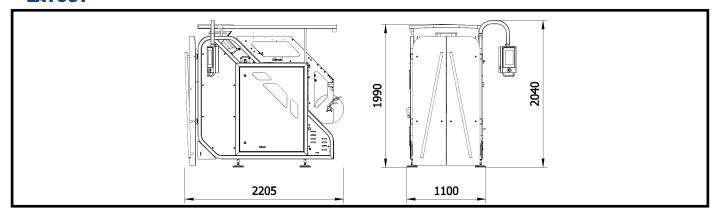

TOTAL WEIGHT	POWER REQ	AIR CONSUMPTION	
420 KG	380 V - 50 Hz 3 Kw	0,25 NL/cycle	

#### **TECHNICAL FEATURES**

WRAPPING MATERIALS	Heat sealable materials, such as polypropylene, barrier films, laminates, paper based films, as well as monolayer and polyethylene films		
ELECTRONIC PLATFORM	ALLEN BRADLEY		

MAX REEL WIDTH	Ø FORMING TUBE	MAX BAG LENGTH	FLAT BAG WIDTH	Ø FILM REEL	MAX SPEED	SEALING JAWS MAX CLEARANCE
630 mm	round: min 40/max 153 mm rectang: min 40/max 180 mm	Continuous motion: 500 mm	240 mm	400 mm	180 cycles/min (product and film depending)	140 mm
	Tootang IIIII 40/IIIAX TOO IIIIII	Intermittent motion: 400 mm				

